
GRETSCH-UNITAS

GB

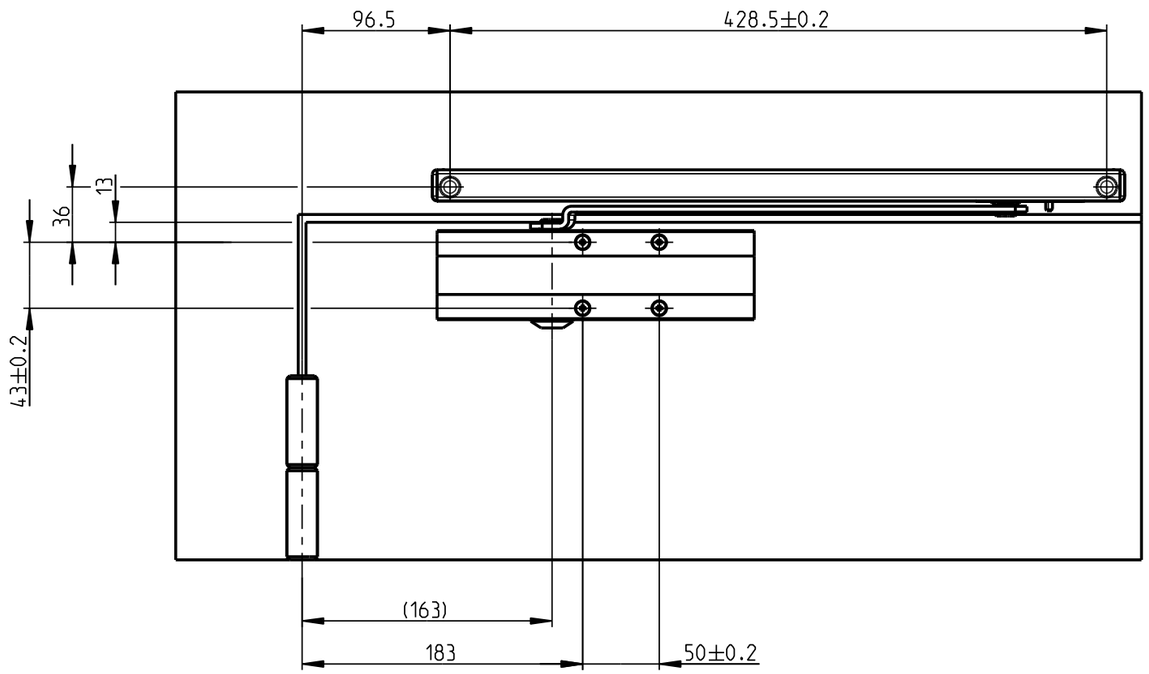

1:1

Pos.	Benennung	Art.-Nr.	St.	Bemerkung
1	OTS 210 ohne Gestänge	K-15710-01	1	
	OTS 430 ohne Gestänge	K-17983	1	
	OTS 430 BC ohne Gestänge	K-17982	1	mit Öffnungsdämpfung
2	Gleitschiene mit Gleitarm	K-17183-02	1	
	Gleitschiene mit Gleitarm MF-EA	K-17183-01	1	mit Feststellvorrichtung, mechanisch ein-/ausschaltbar
	Nachrüstsatz mechanische Feststellung MF-EA	K-17286	1	
	Mechanische Öffnungsbegrenzung	K-17863	1	für Einbau in die Gleitschiene, einstellbar zwischen 80° - 120°
	Edelstahl-Abdeckhaube OTS 210	K-17387-01	1	
	Edelstahl-Abdeckhaube OTS 430	K-17387-02	1	
	Bohrlehre	K-17807		

Hinweis:
nicht an Brandschutztüren verwendbar

Beachte:
Für eine sichere Befestigung ist der Fachbetrieb bzw. der Monteur verantwortlich.
Bei Brandschutztüren sind die entsprechenden Vorschriften und Zulassungen zu beachten.

Description

OTS 210G / 430G
Normalmontage Bandseite
Profil: Neutral


G-U	Release No. --	Level	released		Scale %	Modification 1	Size 3
	Mod. No. G24872	Ver.	--	Wi			
		Draft	08.09.2011	La		Drawing No. 0-45620-PI-0-0	Sheet 1/2
	Replacement for --						


Proprietary rights apply in accordance with ISO 16016.

20110526

GRETSCH-UNITAS

GB

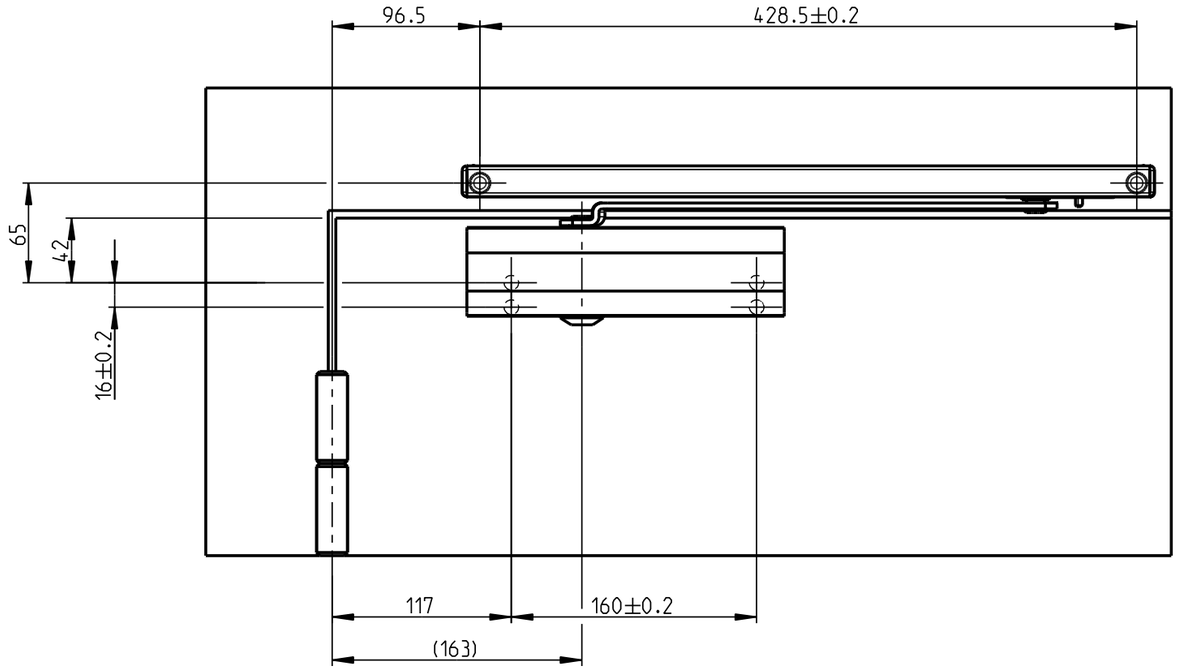

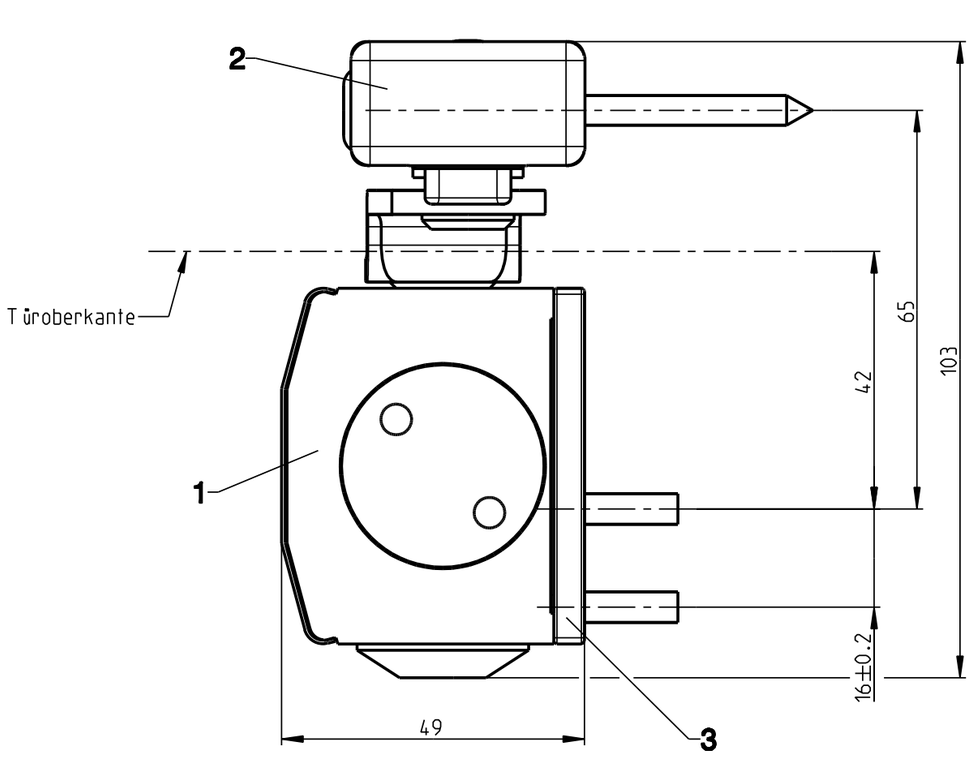

1:1

Pos.	Benennung	Art.-Nr.	St.	Bemerkung
1	OTS 210 ohne Gestänge	K-15710-01	1	
	OTS 430 ohne Gestänge	K-17983	1	
	OTS 430 BC ohne Gestänge	K-17982	1	mit Öffnungsdämpfung
2	Gleitschiene mit Gleitarm	K-17183-02	1	
	Gleitschiene mit Gleitarm MF-EA	K-17183-01	1	mit Feststellvorrichtung, mechanisch ein-/ausschaltbar
3	Montageplatte OTS 210	K-15714	1	
	Montageplatte OTS 430	K-16547	1	
	Nachrüstsatz mechanische Feststellung MF-EA	K-17286	1	
	Mechanische Öffnungsbegrenzung	K-17863	1	für Einbau in die Gleitschiene, einstellbar zwischen 80° - 120°
	Edelstahl-Abdeckhaube OTS 210	K-17387-01	1	
	Edelstahl-Abdeckhaube OTS 430	K-17387-02	1	
	Bohrlehre	K-17807		

Hinweis:
nicht an Brandschutztüren verwendbar

Beachte:
Für eine sichere Befestigung ist der Fachbetrieb bzw. der Monteur verantwortlich.
Bei Brandschutztüren sind die entsprechenden Vorschriften und Zulassungen zu beachten.

Description


OTS 210G / 430G
Normalmontage Bandseite , mit Montageplatte
Profil: Neutral


G-U	Release No. --	Level	released		Scale %	Modification 1 / Size 3
	Mod. No. G24872	Ver.	--	Wi		
		Draft	08.09.2011	La		Drawing No. 0-45620-PI-0-0 / Sheet 2/2
	Replacement for --					

Proprietary rights apply in accordance with ISO 16016.

GRETSCH-UNITAS

GB

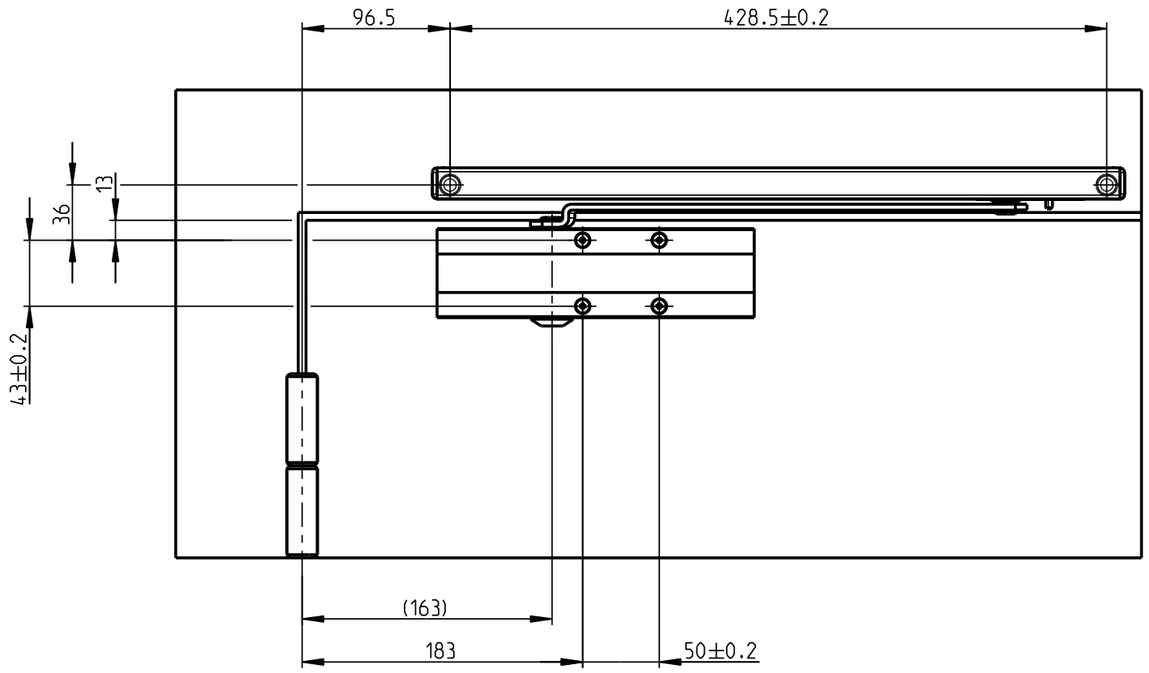

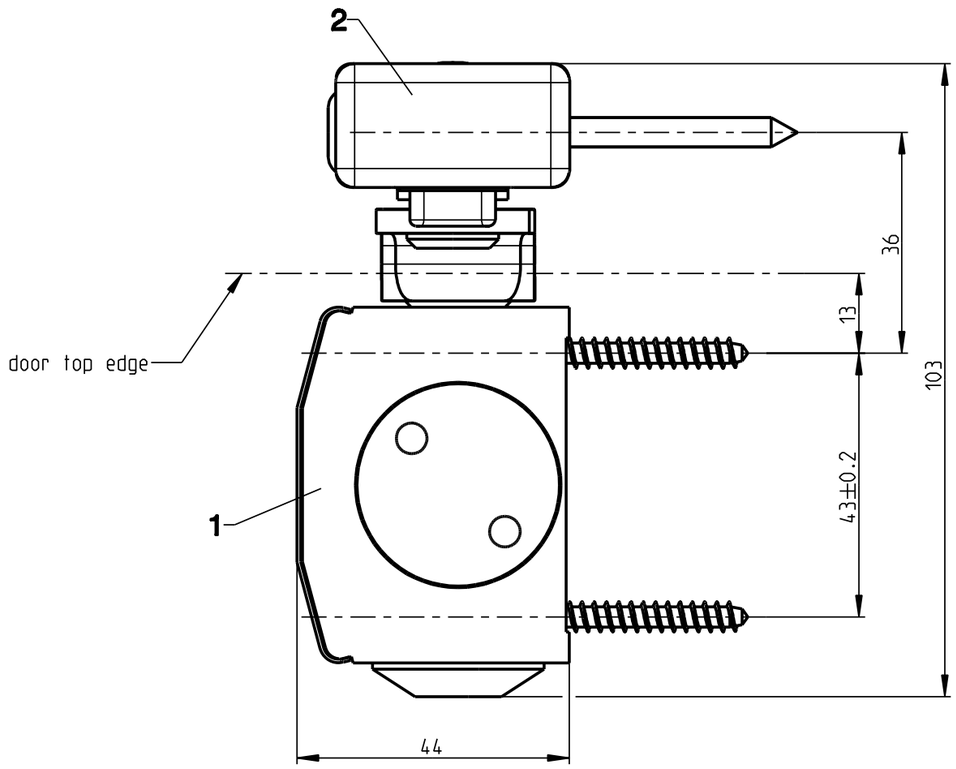

1:1

Item	Description	Article no.	Qty.	Remark
1	OTS 210 without arm	K-15710-01	1	
	OTS 430 without arm	K-17983	1	
	OTS 430 BC without arm	K-17982	1	with backcheck
2	Gliding rail with slide arm	K-17183-02	1	
	Gliding rail with slide arm MF-EA	K-17183-01	1	with mechanical hold-open device, on / off switchable
	Upgrade set mechanical hold-open device MF-EA	K-17286	1	
	mechanical opening restrictor	K-17863	1	for installation into the gliding rail, adjustable between 80° - 120°
	stainless steel-cover OTS 210	K-17387-01	1	
	stainless steel-cover OTS 430	K-17387-02	1	
	Drilling jig	K-17807		

Indication:
not for use on fire doors

Notice:
The installer is responsible for the secure fastening of the door closer.
If mounted on fire doors, the appropriate directives and approvals must be observed.

Description

OTS 210G / 430G
Standard mounting on hinge side
Profile: neutral


G-U	Release No. --	Level	released		Scale %	Modification 1	Size 3
	Mod. No. G24872	Ver.	--	Wi		Drawing No. 0-45620-PI-0-GB	Sheet 1/2
		Draft	08.09.2011	La			
	Replacement for --						

Proprietary rights apply in accordance with ISO 16016.

20110526

GRETSCH-UNITAS

GB

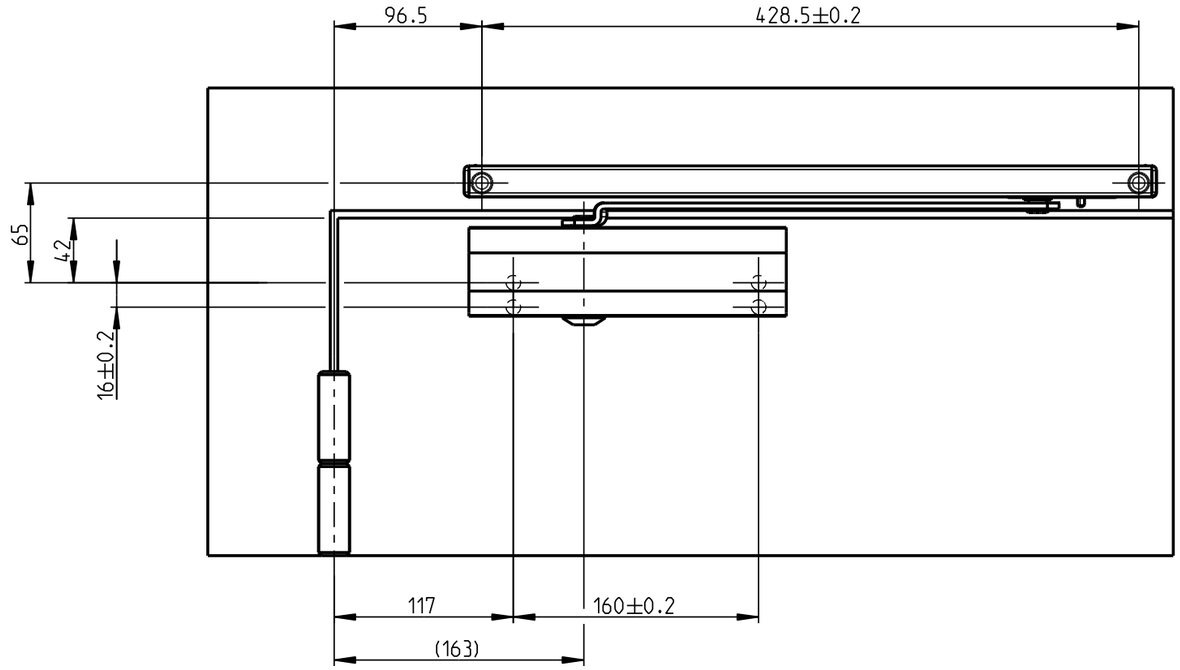

1:1

Item	Description	Article no.	Qty.	Remark
1	OTS 210 without arm	K-15710-01	1	
	OTS 430 without arm	K-17983	1	
	OTS 430 BC without arm	K-17982	1	with backcheck
2	Gliding rail with slide arm	K-17183-02	1	
	Gliding rail with slide arm MF-EA	K-17183-01	1	with mechanical hold-open device, on / off switchable
3	Mounting plate OTS 210	K-15714	1	
	Mounting plate OTS 430	K-16547	1	
	Upgrade set mechanical hold-open device MF-EA	K-17286	1	
	mechanical opening restrictor	K-17863	1	for installation into the gliding rail, adjustable between 80° - 120°
	stainless steel-cover OTS 210	K-17387-01	1	
	stainless steel-cover OTS 430	K-17387-02	1	
	Drilling jig	K-17807		

Indication:
not for use on fire doors

Notice:
The installer is responsible for the secure fastening of the door closer.
If mounted on fire doors, the appropriate directives and approvals must be observed.

Description

OTS 210G / 430G
Standard mounting on hinge side , with mounting plate
Profile: neutral

G-U	Release No. --	Level	released		Scale %	Modification 1 / Size 3
	Mod. No. G24872	Ver.	--	Wi		
		Draft	08.09.2011	La		Drawing No. 0-45620-PI-0-GB / Sheet 2/2
	Replacement for --					

Proprietary rights apply in accordance with ISO 16016.

20110526